



## HIGH PERFORMANCE PEEK POLYMERS

*“Are your electronic components ready for the rigors of lead-free solder assembly?”* Environmental legislation restricting the use of lead, along with commercial pressures are driving the industry to implement the use of lead-free materials in all electronic assemblies. End users have begun to specify components capable of surviving the increased reflow temperatures associated with lead-free solder systems. In contrast to traditional polymeric materials, high-temperature resistant VICTREX® PEEK polymer readily meets the demands of the most rigorous lead-free solder processes.

### HIGHER PROCESS TEMPERATURE REQUIREMENTS


When compared to conventional lead solders which have a processing temperature of approximately 230°C (446°F), lead-free alternatives require extended exposure (preheating and reflow) at higher maximum temperatures which often exceed 260°C (500°F).

### TRADITIONAL MATERIALS UNABLE TO WITHSTAND PROCESSING REQUIREMENTS

Because of these higher temperature requirements, many of the traditional polymeric materials used for electronic components fail. PBT, Nylon and PPS fail because they distort or melt under lead-free solder conditions. LCP has mechanical strength limitations and is on the edge of thermal performance.

### KEY FEATURES OF VICTREX PEEK POLYMER

- **High Temperature Resistance** — has a heat resistance of up to 315°C (600°F). It maintains strength and dimensional stability at high temperatures which is especially important in sealed electronic components where internal pressure can deform parts.
- **Dimensional Stability** — maintains tight dimensional tolerance during the solder process. This ensures proper sealing for components such as relays/interposers.
- **Low Outgassing** — outgassing can contaminate and interfere with performance of electrical contacts. It can also raise internal pressures of sealed components during the solder process.

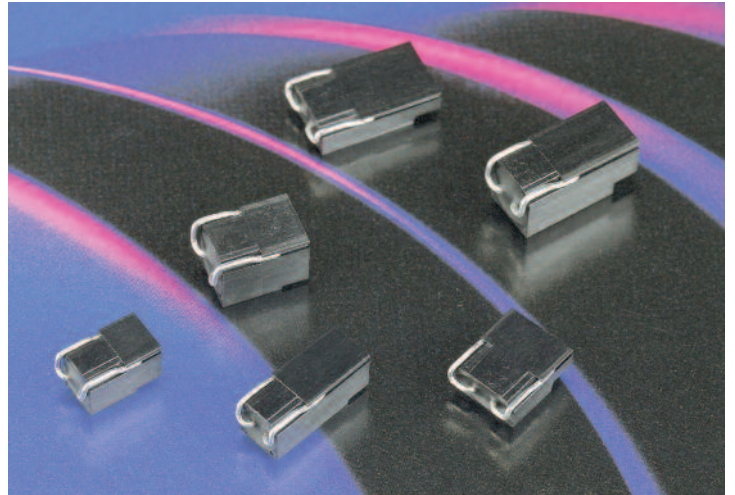

Under pressure to protect the environment, the semiconductor industry in Japan is taking measures to implement lead-free soldering technologies for mounting electronics parts and components. To meet these new requirements, Shoei Co. Ltd., of Tokyo selected VICTREX® PEEK polymer for the resin mold cases of its 'PetitCap' aluminum electrolytic capacitor.

- **Low Moisture Absorption** — important in lowering the total outgassing and maintaining tight dimensional control.
- **ECO Compliant (Green) FR Systems** — naturally flame retardant without the need for toxic additives (halogens, bromines, etc.).
- **Low Particle Generation** — important when components are sensitive to any particulate shedding which could impact component functionality and reliability.
- **Fully Recyclable** — unlike numerous epoxy systems, VICTREX PEEK polymer is fully recyclable.

For Lead-Free Soldering Processes

**VICTREX PEEK Polymer Grades**

<b>VICTREX PEEK 90G</b>	unfilled, high flow PEEK
<b>VICTREX PEEK 150G</b>	unfilled, standard flow PEEK
<b>VICTREX PEEK 90GL30</b>	30% glass-reinforced high flow PEEK
<b>VICTREX PEEK 150GL30</b>	30% glass-reinforced standard flow PEEK
<b>Custom Formulations</b>	formulations containing unique fillers that address high strength or low CTE are available upon request.

In most cases, filled materials are required to increase heat distortion temperature (HDT), reduce coefficient of thermal expansion (CTE) and improve mechanical properties.

**APPLICATION AREAS**

- Signal Relays
- Capacitor Covers
- Battery Components
- Interposer Covers
- Connectors
- Telecom Coaxial Plugs

**Material Comparison**

	Tensile Strength psi (MPa)	Heat Deflection Temp. °C (°F)	Melting Temp. °C (°F)	Outgassing at 250°C (482°F) (ppm)	Water Absorption @ 24hrs (%)	Comments
<b>VICTREX PEEK (GF*)</b>	23,900 (165)	315 (599)	340 (644)	<5	0.11	VICTREX PEEK polymer meets the demands for the most rigorous lead-free solder processes.
<b>LCP (GF)</b>	21,800 (150)	250 (482)	310 (590)	<10	0.04	In some cases, material survives lead-free temperatures but has poor mechanical strength.
<b>PPS (GF)</b>	20,300 (140)	260 (500)	270 (518)	>40	0.02	Material will typically distort under solder temperatures.
<b>PA66 (GF)</b>	23,200 (160)	250 (482)	260 (500)	>40	1.60	Material will typically distort under solder temperatures.
<b>PBT (GF)</b>	17,500 (120)	200 (390)	220 (428)	>40	0.30	Material will typically distort under solder temperatures.

\*GF=glass reinforced

**World Headquarters**

Victrex plc  
Hillhouse International  
Thornton Cleveleys  
Lancashire FY5 4QD  
United Kingdom  
Tel: + (44) 1253 897700  
Fax: + (44) 1253 897701  
Email: victrexplc@victrex.com

**Americas**

Victrex USA Inc  
300 Conshohocken State Road  
Suite 120  
West Conshohocken, PA 19428  
USA  
Tel: + (1) 800-VICTREX  
Tel: + (1) 484-342-6001  
Fax: + (1) 484-342-6002  
Email: americas@victrex.com

**Europe**

Victrex Europa GmbH  
Langgasse 16  
65719 Hofheim/Ts.  
Germany  
Tel: + (49) 6192 96490  
Fax: + (49) 6192 964948  
Email: eurosales@victrex.com

**Asia Pacific**

Victrex Japan Inc.  
Mita Kokusai Building Annex  
4-28, Mita 1-chome  
Minato-ku  
Tokyo 108-0073  
Japan  
Tel: +81 (0)3 5427 4650  
Fax: +81 (0)3 5427 4651  
Email: japansales@victrex.com

**Asia Pacific**

Victrex High Performance  
Materials (Shanghai) Co Ltd  
Part B Building G  
No. 1688 Zhuanxing Road  
Xinzhuang Industry Park  
Shanghai 201108  
China  
Tel: + (86) 21-6113 6900  
Fax: + (86) 21-6113 6901  
Email: scsales@victrex.com

©Victrex Polymer Solutions

VICTREX PLC BELIEVES THAT THE INFORMATION CONTAINED IN THIS BROCHURE IS AN ACCURATE DESCRIPTION OF THE TYPICAL CHARACTERISTICS AND/OR USES OF THE PRODUCT OR PRODUCTS, BUT IT IS THE CUSTOMER'S RESPONSIBILITY TO THOROUGHLY TEST THE PRODUCT IN EACH SPECIFIC APPLICATION TO DETERMINE ITS PERFORMANCE, EFFICACY AND SAFETY FOR EACH END-USE PRODUCT, DEVICE OR OTHER APPLICATION. SUGGESTIONS OF USES SHOULD NOT BE TAKEN AS INDUCEMENTS TO INFRINGE ANY PARTICULAR PATENT. THE INFORMATION AND DATA CONTAINED HEREIN ARE BASED ON INFORMATION WE BELIEVE RELIABLE. MENTION OF A PRODUCT IN THIS DOCUMENTATION IS NOT A GUARANTEE OF AVAILABILITY. VICTREX PLC RESERVES THE RIGHT TO MODIFY PRODUCTS, SPECIFICATIONS AND/OR PACKAGING AS PART OF A CONTINUOUS PROGRAM OF PRODUCT DEVELOPMENT. VICTREX® IS A REGISTERED TRADEMARK OF VICTREX MANUFACTURING LIMITED. VICTREX PIPES™ IS A TRADEMARK OF VICTREX MANUFACTURING LIMITED. PEEK-ESD™, HT™, ST™ AND WG™ ARE TRADEMARKS OF VICTREX PLC. VICOTE® AND APTIV® ARE REGISTERED TRADEMARKS OF VICTREX PLC.

VICTREX PLC MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, A WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR OF INTELLECTUAL PROPERTY NON-INFRINGEMENT, INCLUDING, BUT NOT LIMITED TO PATENT NON-INFRINGEMENT, WHICH ARE EXPRESSLY DISCLAIMED, WHETHER EXPRESS OR IMPLIED, IN FACT OR BY LAW. FURTHER, VICTREX PLC MAKES NO WARRANTY TO YOUR CUSTOMERS OR AGENTS, AND HAS NOT AUTHORIZED ANYONE TO MAKE ANY REPRESENTATION OR WARRANTY OTHER THAN AS PROVIDED ABOVE. VICTREX PLC SHALL IN NO EVENT BE LIABLE FOR ANY GENERAL, INDIRECT, SPECIAL, CONSEQUENTIAL, PUNITIVE, INCIDENTAL OR SIMILAR DAMAGES, INCLUDING WITHOUT LIMITATION, DAMAGES FOR HARM TO BUSINESS, LOST PROFITS OR LOST SAVINGS, EVEN IF VICTREX HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, REGARDLESS OF THE FORM OF ACTION.

